24" Optional Exhaust Collar 13"x13" 51" 1x Optional Supply Collar 10"x16" MOUNTING BRACKET (TYP. OF 4)

MODEL INFORMATION TYPE DIMENSIONS CFM SPECS WEIGHT SUPPLY PLENUM¹ LENGTH WIDTH HEIGHT **EXHAUST PLENUM** 230 lbs 72" 51" 24" 1813 @ 0.5 ESP 1450 @ 0.12 ESP

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

¹ Sold Separately

STANDARD COMPONENTS INCLUDED												
MOUNTING BRACKET 12-GAUGE GALVANIZED		Incandescent Light Fixture	Standoff	tandoff Grease Drain Grease Cup Stainless Stee NSF		Grease Filter Stainless Steel UL 1046						
QTY		UL Listed (Included		QTY	QTY	QTY	Length	Height				
	4	Component)	3" back	1		0	16"	16"				
		QTY	standoff included		1	1	20"	16"				
		1				2	25"	16"				


SUGGESTED COMPONENTS Shipping Crate Supply Collar (Built-in Fire Damper) **Exhaust Collar** Side Standoff Dimensions (in) and Weight (lb) 76" Length: 16-Gauge Cold Rolled Build 16-Gauge Cold Rolled Build 55" Width: □ NONE □ 3" 32" Size Size Height: 13" x 13" 10"x16" Weight: 290 lbs


BSSM48 ETL-6

STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

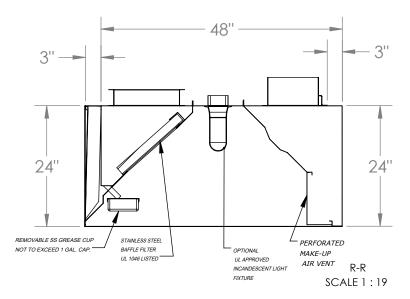



Superior Hoods				BSSM48 ETL-6						
PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com			BSSM48 ETL HOOD MODEL STANDARD SPEC SHEET							
APPROVED			SIZE	CODE		DWG NO		REV		
CHECKED			В					01		
DRAWN	PRODUCTION	2023	SC	ALE: 1:33	WEIC	SHT: 230 lbs	SHEET: 1/	′1		