

TYPE	[	DIMENSIONS		CFM SI	PECS	WEIGHT	
Ι	LENGTH	WIDTH	HEIGHT	EXHAUST PLENUM	SUPPLY PLENUM <sup>1</sup>	382 lbs	
I	144"	51"	24"	3626 @ 0.5 ESP	2900 @ 0.12 ESP		
OBS ·							

OB2:

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

<sup>1</sup> Sold Separately

STANDARD COMPONENTS INCLUDED								
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF		Grease Filter Stainless Steel UL 1046		
QTY	UL Listed (Included	3" back standoff included	QTY	QTY	QTY	Length	Height	
	Component)		ndoff		0	16"	16"	
6	QTY			2	1	20''	16"	
	3				5	25"	16"	


SUGGESTED COMPONENTS						
		Side	Shipping Crate			
Ex	haust Collar	Standoff	Dimensions ( Weight (	in) and lb)		
16-Ga	uge Cold Rolled		Length:	148"		
	Build		Width:	55"		
QTY	Size		Height:	32"		
1	14" x 24"		Weight:	502 lbs		


## **VSE48 ETL-12**

## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

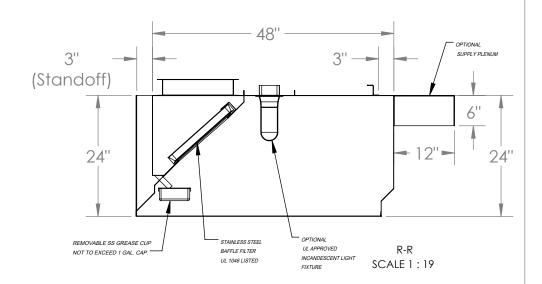

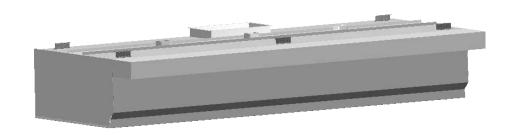

Superior Hoods	VSE48 ETL-12					
PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com	VSE48 ETL HOOD MODEL STANDARD SPEC SHEET					2D
APPROVED	SIZE	CODE		DWG NO		REV
CHECKED	В					01
DRAWN PRODUCTION 2023	SCALE: 1:33		WEIGHT: 382 lbs		SHEET: 1/1	