


## **VSE48 ETL-13**

## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

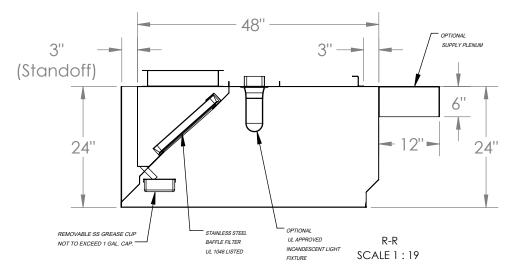


## MODEL INFORMATION TYPE DIMENSIONS WEIGHT CFM SPECS SUPPLY PLENUM<sup>1</sup> **EXHAUST PLENUM** LENGTH WIDTH HEIGHT 408 lbs 3142 @ 0.12 ESP 156" 51" 24" 3928 @ 0.5 ESP

OBS.:

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

<sup>1</sup> Sold Separately

| ocia coparatory                         |                                      |                                 |                 |                                      |   |        |        |  |
|---|--------------------------------------|---------------------------------|-----------------|--------------------------------------|---|--------|--------|--|
| STANDARD COMPONENTS INCLUDED            |                                      |                                 |                 |                                      |   |        |        |  |
| MOUNTING BRACKET<br>12-GAUGE GALVANIZED | Incandescent<br>Light Fixture        | Standoff                        | Grease<br>Drain | Grease Cup<br>Stainless Steel<br>NSF | Grease Filter<br>Stainless Steel<br>UL 1046 |        |        |  |
| QTY                                     | UL Listed<br>(Included<br>Component) | 3" back<br>standoff<br>included | QTY             | QTY                                  | QTY   | Length | Height |  |
|   |                                      |                                 | 2               | 2                                    | 0   | 16"    | 16"    |  |
| 6                                       | QTY                                  |                                 |                 |                                      | 4   | 20"    | 16"    |  |
|   | 3                                    |                                 |                 |                                      | 3   | 25"    | 16"    |  |

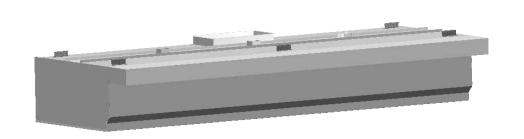

|                               | SUGGESTED COMPONENTS |                |                                    |         |  |  |
|-------------------------------|----------------------|----------------|------------------------------------|---------|--|--|
| Exhaust Collar                |                      | Side           | Shipping Crate                     |         |  |  |
|                               |                      | Standoff       | Dimensions (in) and<br>Weight (lb) |         |  |  |
| 16-Gauge Cold Rolled<br>Build |                      |                | Length:                            | 160"    |  |  |
|                               |                      | □ NONE<br>□ 3" | Width:                             | 55"     |  |  |
| QTY                           | Size                 |                | Height:                            | 32"     |  |  |
| 1                             | 14" x 26"            |                | Weight:                            | 538 lbs |  |  |

| Superior Hoods |   | VSE48 ETL-13 |   |      |           |      |             |           |     |
|----------------|---|--------------|---|------|-----------|------|-------------|-----------|-----|
|                | PO BOX 47607 - ATLANTA, GA 30360<br>PHONE: 770.936.0770 - www.superiorhoods.com |              | VSE48 ETL HOOD MODEL STANDARD<br>SPEC SHEET |      |           |      |             |           |     |
|                | APPROVED  |              |   | SIZE | CODE      |      | DWG NO      |           | REV |
|                | CHECKED   |              |   | В    |           |      |             |           | 01  |
|                | DRAWN   | PRODUCTION   | 2023  | SC   | ALE: 1:35 | WEIC | HT: 408 lbs | SHEET: 1/ | 1   |