


## **VSE48 ETL-15**

## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

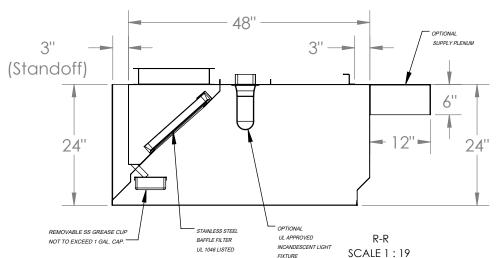


## MODEL INFORMATION TYPE DIMENSIONS WEIGHT CFM SPECS SUPPLY PLENUM<sup>1</sup> **EXHAUST PLENUM** LENGTH WIDTH HEIGHT 463 lbs 3626 @ 0.12 ESP 180" 51" 24" 4532 @ 0.5 ESP

OBS.:

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

<sup>1</sup> Sold Separately

STANDARD COMPONENTS INCLUDED									
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046				
QTY	UL Listed (Included	3" back	QTY	QTY	QTY	Length	Height		
	Component)		2	2	0	16"	16"		
6	QTY	standoff included			4	20"	16"		
	3	]			4	25"	16"		

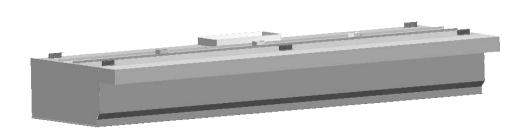

	SUGGESTED COMPONENTS						
		Side	Shipping Crate				
Ex	thaust Collar	Standoff	Dimensions (in) and Weight (lb)				
16-Gauge Cold Rolled Build			Length:	184"			
		□ NONE □ 3"	Width:	55"			
QTY	Size		Height:	32"			
1	14" x 30"		Weight:	613 lbs			

Superior Hands			VSE48 ETL-15						
			VSE48 ETL HOOD MODEL STANDARD SPEC SHEET						
	APPROVED			SIZE	CODE		DWG NO		REV
	CHECKED			В					01
	DRAWN	PRODUCTION	2023	SC	ALE: 1:38	WEIC	HT: 463 lbs	SHEET: 1/	1