

TYPE		DIMENSIONS		CFM SF	PECS	WEIGHT
-	LENGTH	WIDTH	HEIGHT	EXHAUST PLENUM	SUPPLY PLENUM <sup>1</sup>	493 lbs
	192"	51"	24"	4835 @ 0.5 ESP	3867 @ 0.12 ESP	


OBS.:

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

<sup>1</sup> Sold Separately

STANDARD COMPONENTS INCLUDED							
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046		
QTY	UL Listed (Included		QTY	QTY	QTY	Length	Height
	Component)	3" back			0	16"	16"
6	QTY	standoff included	2	2	1	20''	16"
	4				7	25"	16"

	SUGGESTED COMPONENTS						
_		Side Shipping Cro		Crate			
Ex	haust Collar	Standoff	Dimensions (in) and Weight (lb)				
16-Ga	uge Cold Rolled		Length: 196"				
	Build	D NONE	Width:	55"			
QTY	Size		Height:	32"			
1	14" x 32"		Weight:	653 lbs			

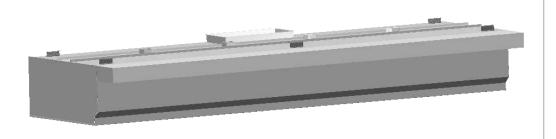

PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com				VSE48 ETL-16					
				VSE48 ETL HOOD MODEL STANDARD SPEC SHEET					
APPROVED			SIZE	CODE		DWG NO		REV	
CHECKED			В					01	
DRAWN	PRODUCTION	2023	SCALE: 1:38		WEIGHT: 493 lbs		SHEET: 1/1		