## 24" Optional Exhaust Collar 10.5"x10.5" -51 3" MOUNTING BRACKET (TYP. OF 4) MODEL INFORMATION

## TYPE DIMENSIONS WEIGHT CFM SPECS SUPPLY PLENUM<sup>1</sup> LENGTH WIDTH HEIGHT **EXHAUST PLENUM** 159 lbs 966 @ 0.12 ESP 48" 51" 24" 1208 @ 0.5 ESP

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

<sup>1</sup> Sold Separately


STANDARD COMPONENTS INCLUDED								
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046			
QTY	UL Listed (Included		QTY	QTY	QTY	Length	Height	
4	Component)	3" back standoff included	1	1	0	16"	16"	
	QTY				1	20"	16"	
	1				1	25"	16"	


## VSE48 ETL-4

## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

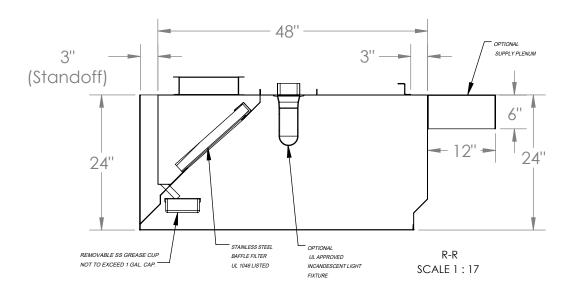



SUGGESTED COMPONENTS						
Exhaust Collar		Side	Shipping Crate			
		Standoff	Dimensions (in) and Weight (lb)			
16-Gauge Cold Rolled Build			Length:	52"		
		□ NONE	Width:	55"		
QTY	Size		Height:	32"		
1	10.5" x 10.5"		Weight:	199 lbs		

PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com			VSE48 ETL-4					
			VSE48 ETL HOOD MODEL STANDARD SPEC SHEET					
APPROVED			SIZE	CODE		DWG NO		REV
CHECKED			В					01
DRAWN	PRODUCTION	2023	SCALE: 1:33		WEIGHT: 159 lbs		SHEET: 1/1	