
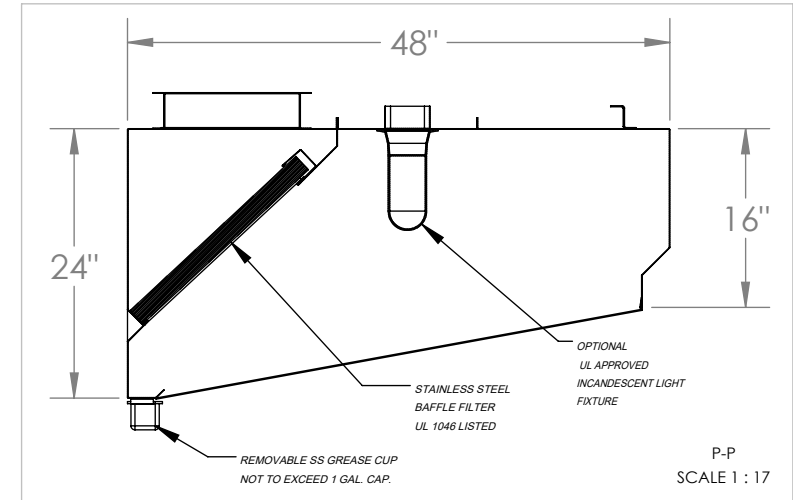


VSE48-5

STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

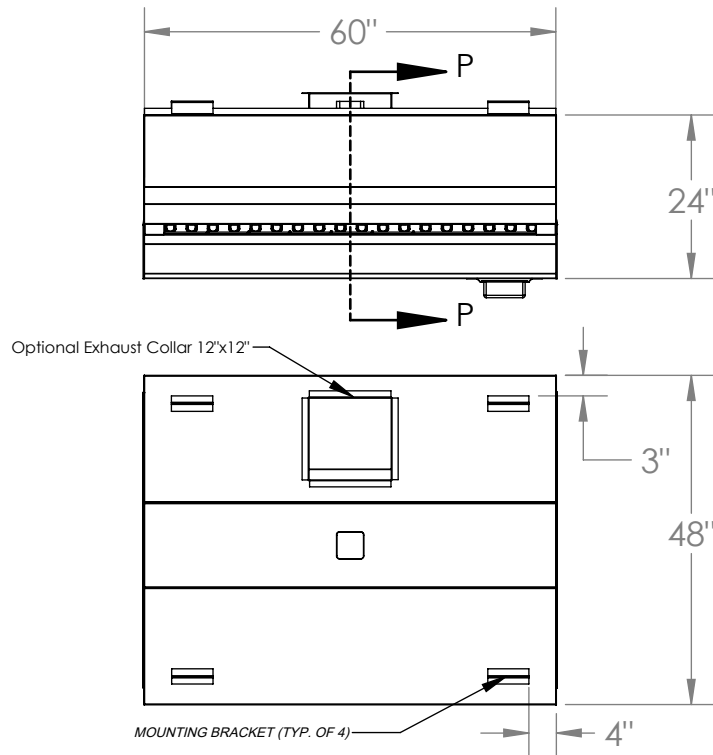



MODEL INFORMATION						
TYPE	DIMENSIONS			CFM SPECS		WEIGHT
	LENGTH	WIDTH	HEIGHT	EXHAUST PLENUM	SUPPLY PLENUM	
1	60"	48"	24"	1510 @ 0.5 ESP	1208 @ 0.12 ESP	140 lbs

OBS.: Installing contractor have the responsibility to ensure hood clearance from limited-combustible and combustible materials is compliant with local code requirements.

STANDARD COMPONENTS					
MOUNTING BRACKET 12-GAUGE GALVANIZED	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046		
QTY	QTY	QTY	QTY	Length	Height
4	1	1	0	16"	20"
			3	20"	20"
			0	25"	20"

SUGGESTED COMPONENTS					
Exhaust Collar		Standoff <input type="checkbox"/> NONE <input type="checkbox"/> 3"	Incandescent Light Fixture UL Listed (Included Component)	Shipping Crate	
QTY	Size			Dimensions (in) and Weight (lb)	
1	12' x 12"	<input type="checkbox"/>	1	Length:	64"
				Width:	52"
				Height:	32"
				Weight:	190 lbs

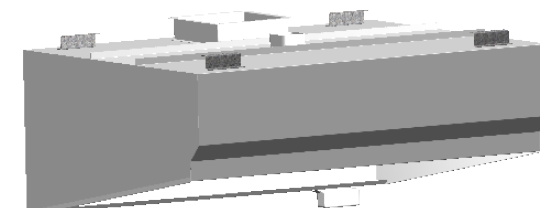

 PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com		PROJECT VSE48-5			
		TITLE VSE48 HOOD MODEL STANDARD SPEC SHEET			
APPROVED	SIZE B	CODE	DWG NO	REV 01	
CHECKED					
DRAWN	PRODUCTION	2023	SCALE: 1:28	WEIGHT: 140 lbs SHEET: 1/1	