- R Optional Exhaust Collar 14"x16" 51" 3'' MOUNTING BRACKET (TYP. OF 4)

MODEL INFORMATION TYPE DIMENSIONS WEIGHT CFM SPECS SUPPLY PLENUM¹ LENGTH WIDTH HEIGHT **EXHAUST PLENUM** 270 lbs 1933 @ 0.12 ESP 96" 51" 24" 2417 @ 0.5 ESP

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

¹ Sold Separately


STANDARD COMPONENTS INCLUDED									
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046				
QTY	UL Listed (Included	3" back	QTY	QTY	QTY	Length	Height		
4	Component)		1	1	0	16"	16"		
	QTY	standoff included			1	20"	16"		
	2				3	25"	16"		


VSE48 ETL-8

STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

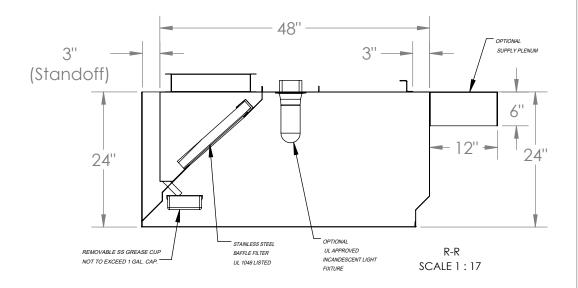

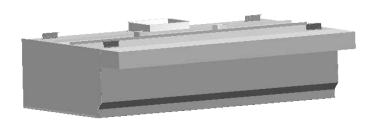

SUGGESTED COMPONENTS							
Exhaust Collar		Side	Shipping Crate				
		Standoff	Dimensions (in) and Weight (lb)				
16-Gauge Cold Rolled Build			Length:	100"			
		□ NONE □ 3"	Width:	55"			
QTY	Size		Height:	32"			
1	14" x 16"		Weight:	350 lbs			

PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com			VSE48 ETL-8					
			VSE48 ETL HOOD MODEL STANDARD SPEC SHEET					
APPROVED			SIZE	CODE		DWG NO		REV
CHECKED			В					01
DRAWN	PRODUCTION	2023	SCALE: 1:33		WEIGHT: 270 lbs		SHEET: 1/1	