

OBS.:

Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

¹ Sold Separately

STANDARD COMPONENTS INCLUDED								
MOUNTING BRACKET 12-GAUGE GALVANIZED	Incandescent Light Fixture	Standoff	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046			
QTY	UL Listed (Included Component)	3" back standoff included	QTY	QTY	QTY	Length	Height	
4			1	1	0	16"	16"	
	QTY				4	20''	16"	
	2				1	25"	16"	


SUGGESTED COMPONENTS							
		Side	Shipping Crate				
Ex	haust Collar	Standoff	Dimensions (in) and Weight (lb)				
16-Gauge Cold Rolled			Length:	112"			
	Build	D NONE	Width:	55"			
QTY	Size		Height:	32"			
1	14" x 18"		Weight:	386 lbs			


VSE48 ETL-9

STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

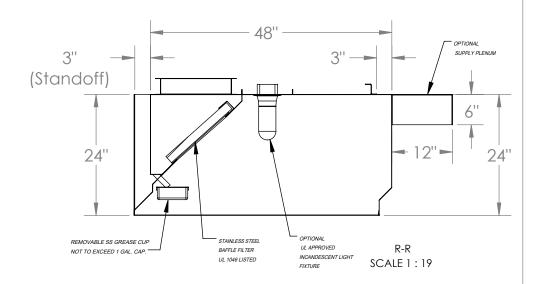

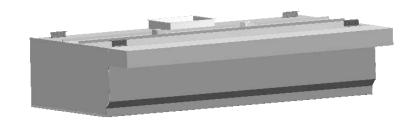

Superior Hours			VSE48 ETL-9					
PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com		VSE48 ETL HOOD MODEL STANDARD SPEC SHEET						
APPROVED			SIZE	CODE		DWG NO		REV
CHECKED			В					01
DRAWN	PRODUCTION	2023	SCALE: 1:33		WEIGHT: 296 lbs		SHEET: 1/1	