
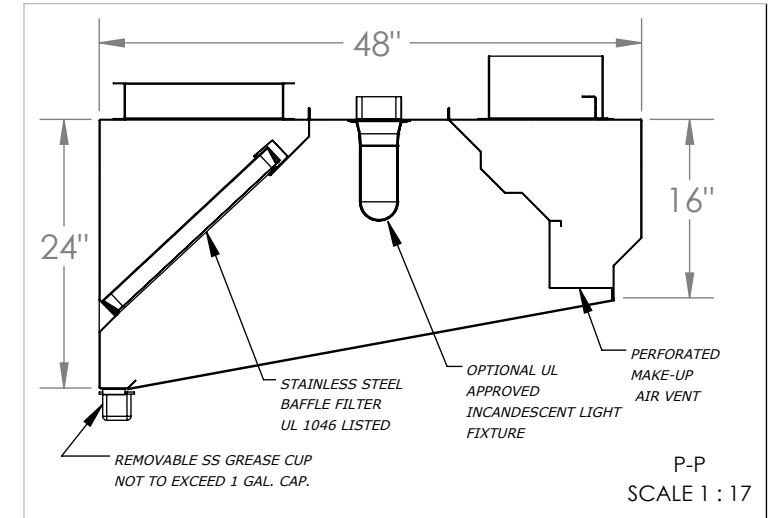
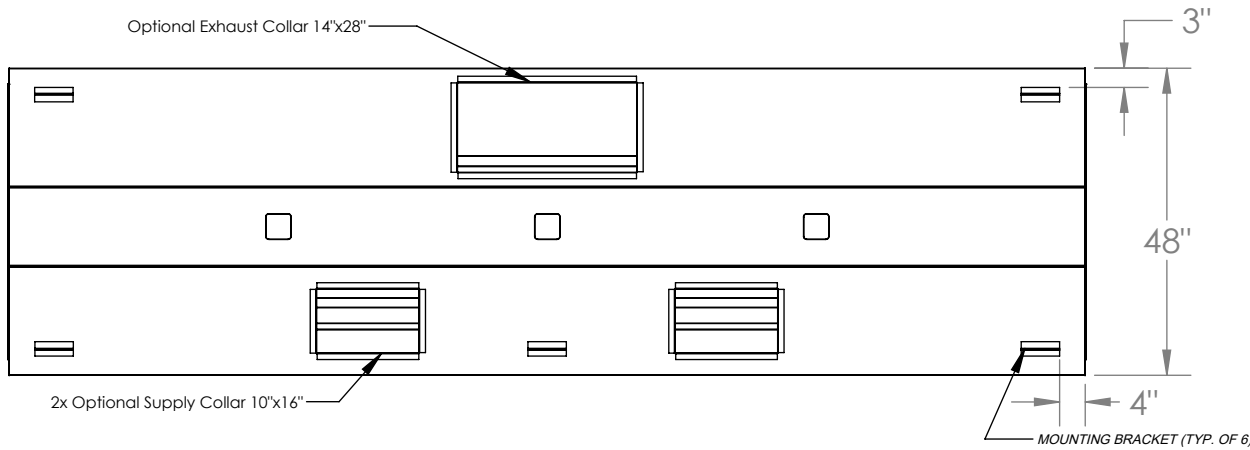


# VSSD48-14


## STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

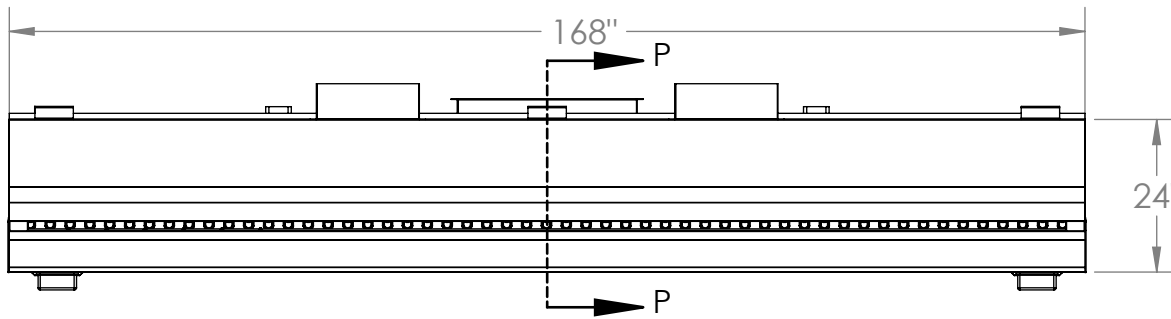

P-P  
SCALE 1 : 17

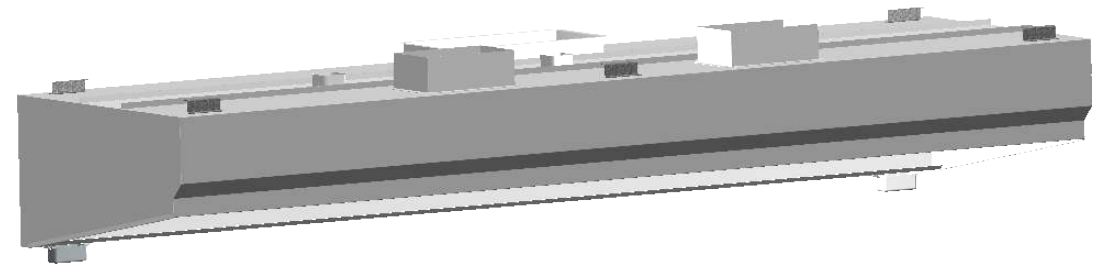

### MODEL INFORMATION

| TYPE | DIMENSIONS |       |        | CFM SPECS      |                 | WEIGHT  |
|------|------------|-------|--------|----------------|-----------------|---------|
|      | LENGTH     | WIDTH | HEIGHT | EXHAUST PLENUM | SUPPLY PLENUM   |         |
| 1    | 168"       | 48"   | 24"    | 4230 @ 0.5 ESP | 3384 @ 0.12 ESP | 395 lbs |

OBS.: Installing contractor have the responsibility to ensure hood clearance from limited-combustible and combustible materials is compliant with local code requirements.

### STANDARD COMPONENTS

| MOUNTING BRACKET<br>12-GAUGE GALVANIZED | Grease<br>Drain | Grease Cup<br>Stainless Steel NSF | Grease Filter<br>Stainless Steel<br>UL 1046 |        |        |
|---|-----------------|-----------------------------------|---|--------|--------|
| QTY                                     | QTY             | QTY                               | QTY   | Length | Height |
| 6                                       | 2               | 2                                 | 0   | 16"    | 20"    |
|   |                 |                                   | 2   | 20"    | 20"    |
|   |                 |                                   | 5   | 25"    | 20"    |

### SUGGESTED COMPONENTS

| Exhaust Collar | Supply Collar<br>(Built-in Fire Damper) |                               | Standoff   | Incandescent Light<br>Fixture        | Shipping Crate                     |         |
|----------------|---|-------------------------------|--|--------------------------------------|------------------------------------|---------|
|                | 16-Gauge Cold<br>Rolled Build           | 16-Gauge Cold<br>Rolled Build |  |                                      | Dimensions (in) and<br>Weight (lb) |         |
|                |   |                               | <input type="checkbox"/> NONE<br><input type="checkbox"/> 3"<br><input type="checkbox"/> _____ | UL Listed<br>(Included<br>Component) | Length:                            | 172"    |
|                |   |                               |  |                                      | Width:                             | 52"     |
| QTY            | Size                                    | QTY                           | Size   | QTY                                  | Height:                            | 32"     |
| 1              | 14" x 28"                               | 2                             | 10" x 16"  | 3                                    | Weight:                            | 535 lbs |



PO BOX 47607 - ATLANTA, GA 30360  
PHONE: 770.936.0770 - www.superiorhoods.com

PROJECT

VSSD48-14

TITLE

VSSD HOOD MODEL STANDARD  
SPEC SHEET

APPROVED

SIZE  
B

CODE

DWG NO

REV  
01

CHECKED

DRAWN

PRODUCTION

2023

SCALE: 1:30

WEIGHT: 395 lbs

SHEET: 1/1