Optional Exhaust Collar 14"x14" AB'' Ix Optional Supply Collar 10"x16" MOUNTING BRACKET (TYP. 0F 4)

MODEL INFORMATION TYPE DIMENSIONS CFM SPECS WEIGHT LENGTH WIDTH HEIGHT EXHAUST PLENUM SUPPLY PLENUM 213 lbs 84" 48" 24" 2115 @ 0.5 ESP 1692 @ 0.12 ESP 213 lbs

OBS.: Installing contractor have the responsability to ensure hood cleareance from limitedcombustible and combustible materials is compliant with local code requirements.

STANDARD COMPONENTS									
MOUNTING BRACKET 12-GAUGE GALVANIZED	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046						
QTY	QTY	QTY	QTY	Length	Height				
	1		0	16"	20"				
4		1	3	20"	20"				
			1	25"	20"				


SUGGESTED COMPONENTS									
	Supply Collar (Built-in Fire Damper)		Standoff	Incandescent Light	Shipping Crate				
Exhaust Collar				Fixture	Dimensions (in) and Weight (lb)				
16-Gauge Cold Rolled Build		16-Gauge Cold Rolled Build		□ NONE	UL Listed (Included	Length:	88"		
					Component)	Width:	52"		
QTY	Size	QTY	Size	<u> </u>	QTY	Height:	32"		
1	14" x 14"	1	10" x 16"	_	1	Weight:	283 lbs		


VSSD48-7

STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2012 507.7.1.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

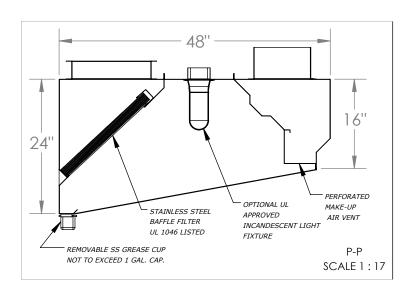

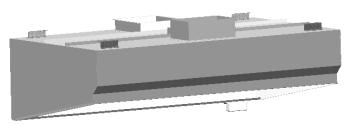

PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com			VSSD48-7					
			VSSD HOOD MODEL STANDARD SPEC SHEET					
APPROVED			SIZE	CODE		DWG NO		REV
CHECKED			В					01
DRAWN	PRODUCTION	2023	SCALE: 1:28		WEIGHT: 213 lbs		SHEET: 1/1	